



# CALYPSO ULTRASONIC Portable Solar

WIND INSTRUMENT AND DATA LOGGER  
User manual



Our awarded Ultrasonic Portable Solar Wind Instrument and data logger is an innovative product, bringing top-notch ultrasonic wind measurement technology to the mobile world. Affordable, portable, with no moving parts, IPX8, easy to install, accurate, and open to third-party apps.

The Calypso Ultrasonic Anemometer brings astonishing technology to a wider range of users, from the sailor to the farmer. It can be used in leisure activities such as nautical, extreme sports, golf, ballistics, archery, drones or in non-leisure applications such as industry, scientific, meteorology, firefighting, energy, agriculture, aviation, infrastructure and construction.

If you want to know more about our new ULTRASONIC PORTABLE Solar wind meter, please keep reading or visit our website at [www.calypsoinstruments.com](http://www.calypsoinstruments.com).

Nominated for the Dame Design Awards 2017


The Dame Awards recognize the best designed products at the Metstrade Show. Its unique relevance in the global marine marketplace emphasizes innovation and environmental impact among others.

## 0. Index

1. Product overview
2. Package content
3. Technical specifications
  - 3.1. Dimensions
  - 3.2. Weight
  - 3.3. Warranty
4. Functions
5. Installation
  - 5.1. Installing the unit
  - 5.2. Installing the App and testing the unit
6. Compatible Apps
7. FAQ/troubleshooting
8. General information
  - 8.1. General recommendations
  - 8.2. Maintenance and repair
  - 8.3. Warranty

## 1. Product overview

The ULTRASONIC Portable Solar Wind Instrument and Data Logger is a wireless (BLE) and self-powered (solar) IPX8 pocket-sized ultrasonic anemometer, easy to install, simple to use and compatible with iOS and Android and Garmin.

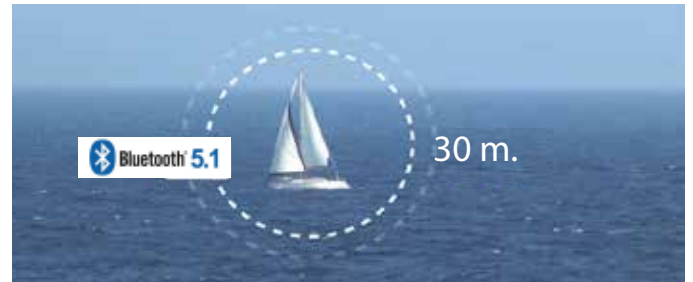

## 2. Package content

The package contains the following:

- Ultrasonic Portable Wind Instrument
- Serial number reference in the back of the packaging
- User Quick guide on the back of the packaging and some more useful information for the customer.

The packaging has been designed for it to be used as a permanent storage box for your unit. It is recommended to keep the box as a permanent storage solution. It will keep your unit safe from impacts and it contains the serial number.

## 3. Technical specifications

### 3.1. Dimensions

- Diameter: 70 mm (2.76 in.)
- Height: 57 mm (2.24 in)



### 3.2. Weight

- 145 grams (5.15 oz.)

### 3.3. Bluetooth

- Version: 5.1 or beyond
- Range: up to 30 m or 98 ft. (open space without electromagnetic noise)

The Ultrasonic Portable uses Bluetooth Low Energy technology (BLE).

BLE is the first open wireless communication technology that communicates between mobile devices or computers and other smaller devices such as our new wind meter.

Compared to Classic Bluetooth, BLE provides considerably reduced power consumption and cost while maintaining a similar communication range.

#### Version

The Portable Solar uses the latest BLE version which is 5.1. BLE facilitates the reconnection between devices when they leave and re-enter the bluetooth range, among other things.

#### Compatible devices

You can use our product with the following devices:

- Compatible Bluetooth 4.0 Android devices or beyond
- iPhone 4S or beyond
- iPad 3rd generation or beyond
- Garmin

#### Range

The coverage range is 50 meters when in an open space free of electromagnetic noise.

## 3. Technical specifications

Ultrasonic Portable incorporates the following technical specifications:

### 3. Technical specifications (continuation)

#### 3.4. Power

The Ultrasonic Portable Solar wind instrument counts on an advanced power management system so no external source of energy is required beyond solar light.

The product has a solar panel integrated on the top that feeds an internal, rechargeable battery located in the interior of the product. Thanks to a laboratory-tested sealing design, the battery is protected against any external agent (water, dust..) reaching an IPX8 protection grade rating.

The internal rechargeable battery cannot be repaired; opening the product will permanently damage the sealing and void the warranty. The battery can handle thousands of charge/discharge cycles and its capacity and overall characteristics guarantee a superb performance along the life of the product. If fully charged, the battery can feed the unit beyond 30 days in the absence of sun (>30 days on continuous measuring in full darkness).

The useful life of the battery is 2100 full charge/discharge cycles.

Battery life is 1 year in sleep mode without sunlight and approximately 30 days while measuring.

See Chart: page 6.

Please note the solar panel has a protective film which should not be removed.



#### Advanced Power management

The Ultrasonic Portable Solar anemometer and wind vane firmware automatically manages power drain, energy storage, and solar production. The firmware sets one of the following battery modes depending on the battery status:

##### *SAFETY MODE*

- Battery level: 0% - 2,5%
- This is a safety mode to prevent permanent battery damage. It does not receive or send any information and it will not be visible via Bluetooth.
- Needs to be charged.

##### *SLEEP MODE*


- Battery voltage: 2,5% - 10%
- In sleep mode the device only provides advertising information (BLE signal). It does not send any wind info.
- Needs to be charged


##### *NORMAL MODE*

- Battery voltage: 10% - 100%

Every mode changes automatically depending on the voltage of the battery.

### BATTERY STORAGE

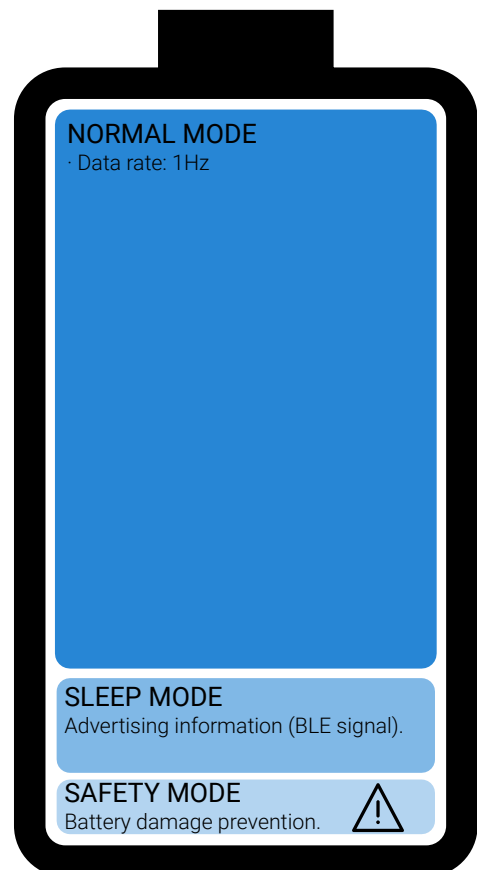

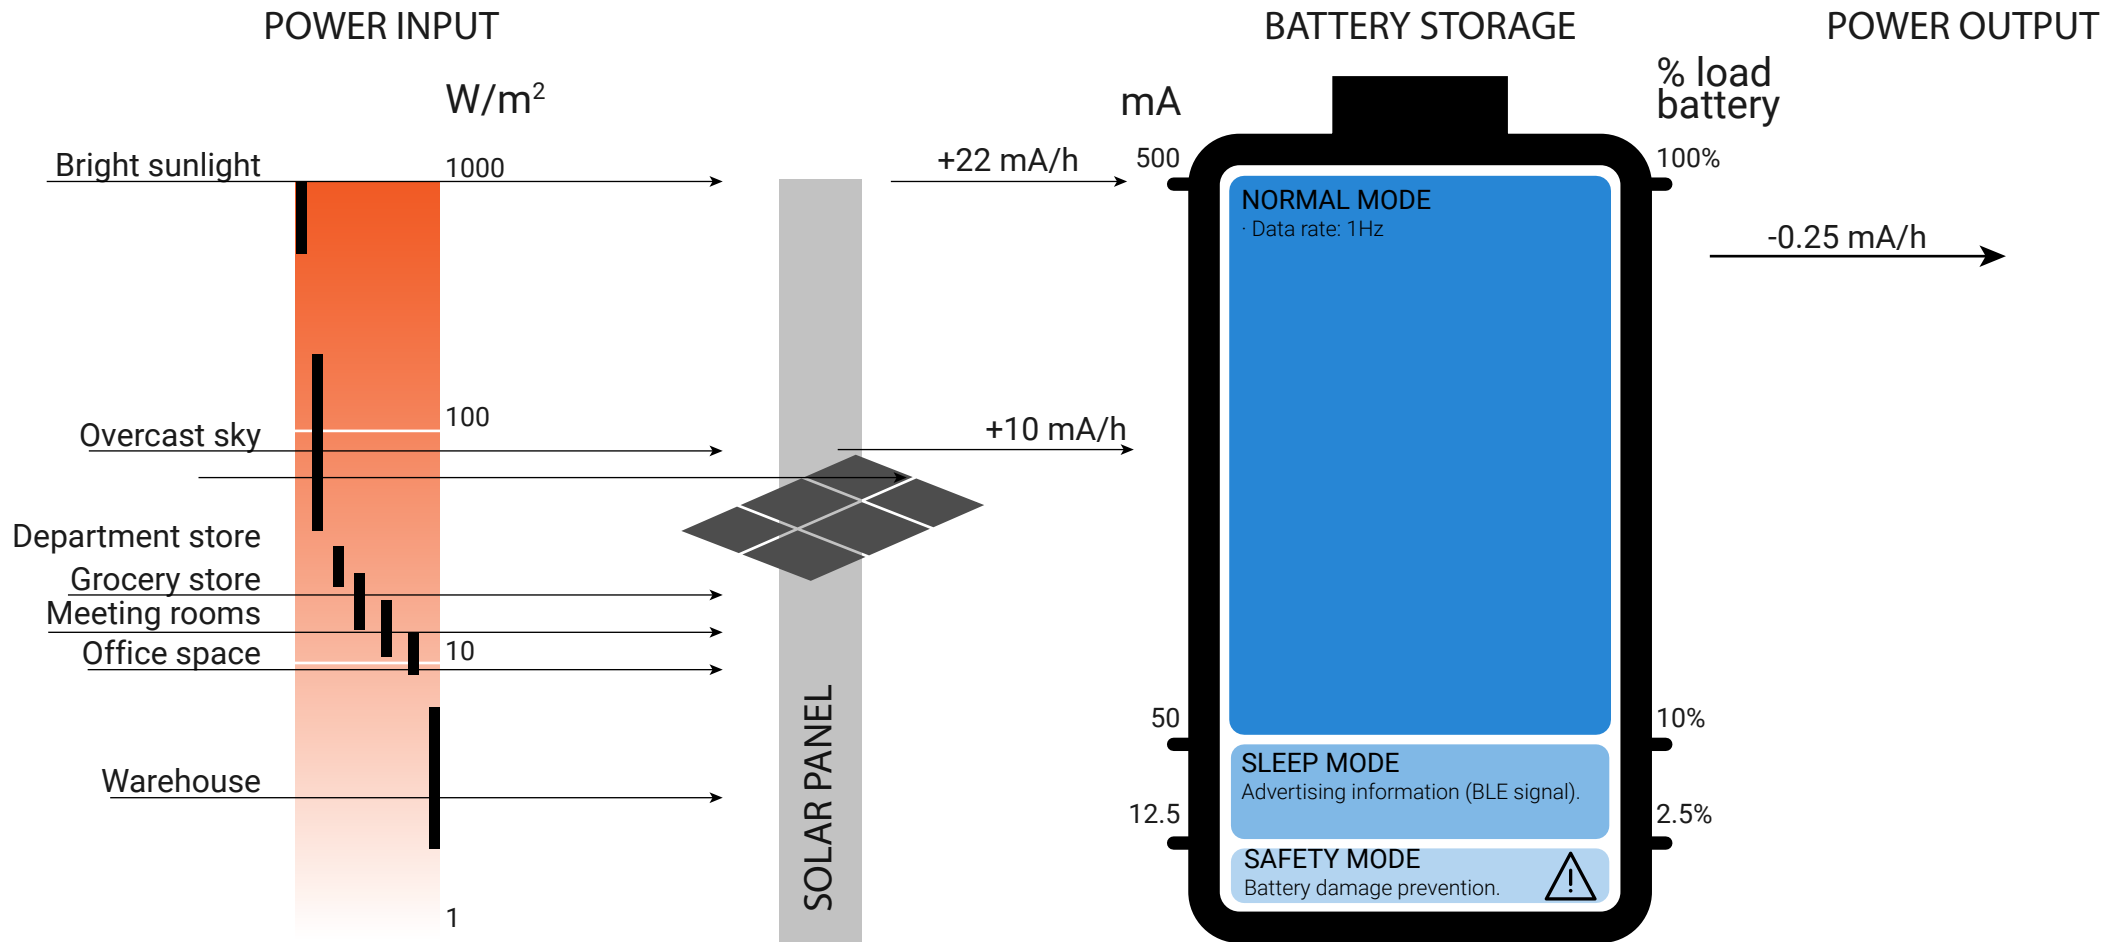

Examples:

Let's say your unit is charged up to 33%. 1/3 of a battery of 500mA battery means you have 167 mA in your battery and you still need 333 mA to reach full charge. On an overcast day, we can estimate a charging rate of 10 mA per hour. If not in use, the solar cell will require 33.3 hours to produce the 333 mA at 10 mA per hour. When in use, the power drain is 0.25 mA per hour. This means that the filling capacity will be  $10 - 0.25$  mA per hour which equals 9.75 mA per hour. In this scenario, to reach full charge (100%, 500 mA) it would take 34 hours while in use.

## 3. Technical specifications (continuation)

### 3.5. Sensors

- Ultrasonic transducers (4x)
- Sample rate: 1 Hz

This product is a wind sensor instrument and has been engineered for the sole use of accurately measuring wind speed and direction using ultrasonic transducers.

#### Ultrasonic transducers (4x)

The Ultrasonic Portable has been designed to avoid any mechanical parts to maximize reliability and minimize maintenance.

The transducers communicate between themselves two by two by using ultrasonic range waves. Each pair of transducers calculate the signal delay and obtain information about both, wind direction and wind speed.



Ultrasonic waves range above 20 kHz(20000 Hz), which is above the audible range of humans. Some animals such as dolphins, bats, frogs, etc...can actually hear waves beyond 20 kHz. However, our low units use only 0,3 miliamps to run all electronics and excite the transducers on "speaker" mode. This results in an ultra-low volume sound, almost impossible to detect by any living being.

### 3.6. Wind information

#### Wind speed

Range: 1 - 25 m/s (2.24 - 56 mph)

Resolution:  $\pm 0.1$  m/s at 10m/s ( $\pm 0.22$  mph at 22.37 mph)

#### Wind direction

Range: 0 - 359°

Resolution:  $\pm 1^\circ$

\*For more information about how to get each value, please visit our website and download latest full manual of the Anemotracker App.

### 3.7. Protection grade · IPX8 (10 meters, 32.8 feet)

The Ultrasonic Portable has been certified by an approved independent laboratoty as IPX8. In order to get the IPX8 code certification, ULTRASONIC PORTABLE has successfully passed a 30 minutes water immersion test at a depth of 10 meters (1bar) with no water ingress. We have also run more severe tests in house with successfull results (even though they are not certified).

However, reaching IPx8 30 min-10 m does not yield warranty of being waterproof at 10 m. The same rationale applies to swimming watches; a watch needs to be tested at 30-50 meters depth to be considered water-resistant at a swimming depth of around 1 meter. For going deeper than (snorkeling, diving) watches are individually tested up to 200-500 m!

Several factors might affect Ultrasonic watertightness: rubber seals and plastics wear and tear, drastic temperature changes (hot air then cold water), previous impacts, pressure increase rate (immersion velocity), water density and temperature, under-water speed and acceleration, ... This is why we do certify that our Ultrasonic is IPX8 30 min-10 m but we cannot guarantee that it is waterproof at 10 m.

### 3. Technical specifications (continuation)

**3.8. Easy mount** · 16 mm or 0.63 in. (M16x2 female thread)

You can mount your Ultrasonic in a simple way as it comes with a threaded lower part (16 mm M16x2 female thread).



A wide range of accessories can be used with the device

#### CARBON FIBER POLE

- 33 cm. (13 in.)
- 100 cm. (39.37 in.)

#### ALUMINUM POLE

- 33 cm. (13 in.)
- 100 cm. (39.37 in.)



#### MAST MOUNT (for Portable and Wired versions)



(Check availability of other sizes through our website).

\*Please, visit our website and check available accessories and their possible combinations.

**3.9. Firmware** · Upgradable

You can update the Ultrasonic Portable firmware via

#### How can I do that?

Follow the next steps:

1. To check the availability of the new firmware version, please visit our webpage and download the file.

2. Download the Calypso Upgrader App available in Google Play or Apple Store.

3. Scan and connect to your device.

Open Calypso Upgrader App. Click on the "Scan and connect" button. Identify and select your Ultrasonic device.

4. Upgrade.

Once it has been connected, click on the "Upgrade" button. You can follow your upgrade status by looking at the bar below the Upgrade button.

The app will automatically disconnect from your device, and it is completely upgraded and ready to be used.

\*Tutorial video available at our website and on our Youtube channel.

### 4. Functions

The Ultrasonic Portable will allow you to perform a great diversity of operations adapting to your needs.

It will provide you information about everything that is shown below through our application *Anemotracker App*, but the most important aspects that facilitate the unit are the following:

- The **Apparent Wind** and **Apparent Wind Angle**

- The **Real Wind** and the **Real Wind Angle** collected by the anemometer and the crossing with the GPS of the connected device.

- All collected data can be stored in the memory of the application, exported and shown on graphs.

\*For more information on How to use Anemotracker App, please visit our website and download the latest version of the app user manual.





## 5. Installation

### 5.1. Installing the unit

The Ultrasonic Portable has to be oriented to the bow of the boat (in non-sailing scenarios it should be aligned to the natural north or to the target) taking as reference the mark that appears at the top (as shown in the image below).



It comes with a threaded lower part (16 mm M16x2 female thread) that can be adapted to your available accessories.

\*Please check our available accessories on our website.

Install the unit in an area where wind reaching the unit is not obstructed by any other object. It should have an unobstructed radius of 2-3 meters.

### 5.2. Installing the App and testing the unit

Follow the next steps:

1. Make sure your device is BLE compatible\*.

· Ultrasonic Portable works with Android 4.3 or 4.4 or iOS devices (4s, iPad2 or beyond).



2. Download and install *Anemotracker App* on your device from Google Play or Apple Store.

3. Once the App is installed, start it and open the settings menu by sliding the screen to the right.

4. Press the button "Scan" and all Ultrasonic Portable devices within the range should show up at screen.

5. Select your device and connect.

If your device connects with the Ultrasonic Portable correctly, continue with the normal installation.

If not, please read the following lines.

#### Your device is compatible but you can not connect?

1. Make sure BT (Bluetooth) mode is running on your smartphone, Tablet or PC.

2. Make sure Ultrasonic Portable is not on Off mode. If the device has not been exposed to any source of light for an extended period of time it might be necessary to keep it under direct sunlight for a few hours. A cloudy day will work too.

4. Make sure no other device is linked to your Ultrasonic Portable.

Each unit can only be connected to a single device at a time. As soon as it gets disconnected, Ultrasonic Portable is ready to link to any other device with the Anemotracker app installed.


For further information please contact Calypso Technical Support.

## 7. Compatible Apps

We constantly work on making the product compatible with a great diversity of applications.

The list below shows some apps that are compatible with our products. We are not responsible for third party bugs, updates, new releases, etc...Therefore, please check with each app developer for current compatibility.

- Anemotracker App (our Own App)
- Sentinel Marine Solutions
- iRegatta
- eStela
- SailRacer
- SailGrib
- EDO sailing instruments
- Weather4D
- Among others...

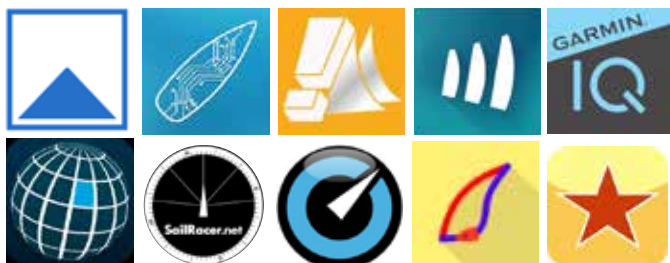

\*Please check current compatibility and features on their websites.

### **Our hardware is open source.**

We are a hardware firm but we developed and maintain Anemotracker App to be used with our products. We realize that our users' diverse needs require tailored solutions beyond our imagination and that's why we decided from the beginning to open our hardware to the world.

We encourage third party software and hardware firms to integrate our hardware on their platforms at their will.

Please check the OEM section of our website for further details.

We made communication as simple as possible; however, if you need support, do not hesitate to contact us either by email ([sales@calypsoinstruments.com](mailto:sales@calypsoinstruments.com)) or by phone (+34 876 45 48 53).

## 8. FAQ/troubleshooting

For FAQ's and troubleshooting, please visit our website at [www.calypsoinstruments.com](http://www.calypsoinstruments.com) for further details.

## 9. General information (continuation)

### 9.2. Maintenance and repair

The ultrasonic does not require great maintenance thanks to the lack of moving parts in this new design.

The solar panel can be cleaned with a damp cloth a few days before using it and place it in a light source / solar to get the battery full of charge.

Before using it, make sure that the device has enough battery to work without problems. You can get that information directly through the application.

Transducers must be kept clean and aligned. Impacts or incorrect impulsive handling may lead to transducers misalignment.

The space around the transducers must be empty and clean. Dust, frost, water, etc... will make the unit stop working. Rinse with freshwater and let dry.

### 9.3. Warranty

Warranty is void in case of not following the instructions of use, repair or maintenance without written authorisation.

This product is for leisure purposes exclusively. Any wrongful use given by the user will not incur in any responsibility on part of Calypso Instruments. As well, any harm caused to ULTRASONIC PORTABLE by accident will not be covered by the warranty. Using assembly elements different from those delivered with the product will void the warranty.

Changes on transducers position/alignment will void any warranty.

For further information please contact Calypso Technical Support through [aftersales@calypsoinstruments.com](mailto:aftersales@calypsoinstruments.com) or visit [www.calypsoinstruments.com](http://www.calypsoinstruments.com).

## 9. General information

### 9.1. General recommendations

The Ultrasonic Portable has been calibrated with accuracy, following the same calibration standards for each unit.

#### Regarding how to mount the unit

As described before, to prepare the mast head for the mechanical installation align the north mark of the Portable Solar in order to have it facing the bow.

Make sure to install the sensor in a location free from anything that obstructs the flow of wind to the sensors within a **2 meter radius**, for example, the mast head on a boat.

#### Other important aspects

**Do not attempt to access the transducer area with your fingers.**

**Solar panel comes with a protective film built-in. Do not remove the film, as it will damage the cell.**

**Do not attempt any modification to the unit.**

**Never paint any part of the unit or alter its surface in any way.**

If you have any questions or doubts, please contact us directly. We will be glad to assist you in any time.

**Calypso Instruments team thanks you for your confidence in our product.**

C/ Alfonso Solans Serrano, 20  
Local 12  
50014 Zaragoza  
Spain  
Telephone number: +34 876 45 48 53  
E-mail: [sales@calypsoinstruments.com](mailto:sales@calypsoinstruments.com)

Calypso Instruments is a Trademark of Prodeo Ingeniería y Consultoría

# Warranty

## 2 YEAR LIMITED WARRANTY

For Warranty service, please send your device  
DIRECTLY to Calypso Instruments.  
See details below.

NOTE: Warranty is void in case of not following  
the instructions of use, repair or maintenance without written authorisation.  
2 Years from the date of purchase against all  
manufacturing defects.

Not Covered by any warranty is the glass, battery, strap, case,  
crown and stem. Also not covered is damaged caused by  
general wear and tear or any accidental damage.  
2 Years on Water Resistance (Only for Waterproof watches  
up to 5 ATM) from the date of purchase.

NOTE: We  
recommend all Watches be serviced, resealed and tested for  
being waterproof every 2 years as heat, salt and other elements  
will diminish seals over time. Have this done at the Davis  
Watch service Center. Cost for the service and resealing will  
be given upon request.

All Warranty claims MUST be sent with a purchase receipt or  
the warranty card delivered with the watch clearly showing the  
purchase date.

### 9.3. Warranty

Warranty is void in case of lack of following the instructions of use, repair or maintenance without written authorisation.

This product is for leisure purposes exclusively. Any wrongful use given by the user will not incur in any responsibility on part of Calypso Instruments. As well, any harm caused to ULTRASONIC PORTABLE by a mistaken use will not be covered by the warranty. Using assembly elements different from those delivered with the product will void the warranty.

Changes on transducers position/alignment will void any warranty.

For further information please contact Calypso Technical Support through [aftersales@calypsoinstruments.com](mailto:aftersales@calypsoinstruments.com)  
or visit [www.calypsoinstruments.com](http://www.calypsoinstruments.com).

PRODEO I&C  
Calle ALFONSO SOLANS SERRANO 20, Local 12  
50014, Zaragoza, Spain  
Telephone number: +34 876 45 48 53  
E-mail: [sales@calypsoinstruments.com](mailto:sales@calypsoinstruments.com)

Calypso Instruments is a Trademark of  
Prodeo Ingeniería y Consultoría



ULTRASONIC Portable Solar  
User manual English version 2.0  
09/11/2022